


# Amiga 1000 110V NA Power Supply Capacitor Replacement Guide

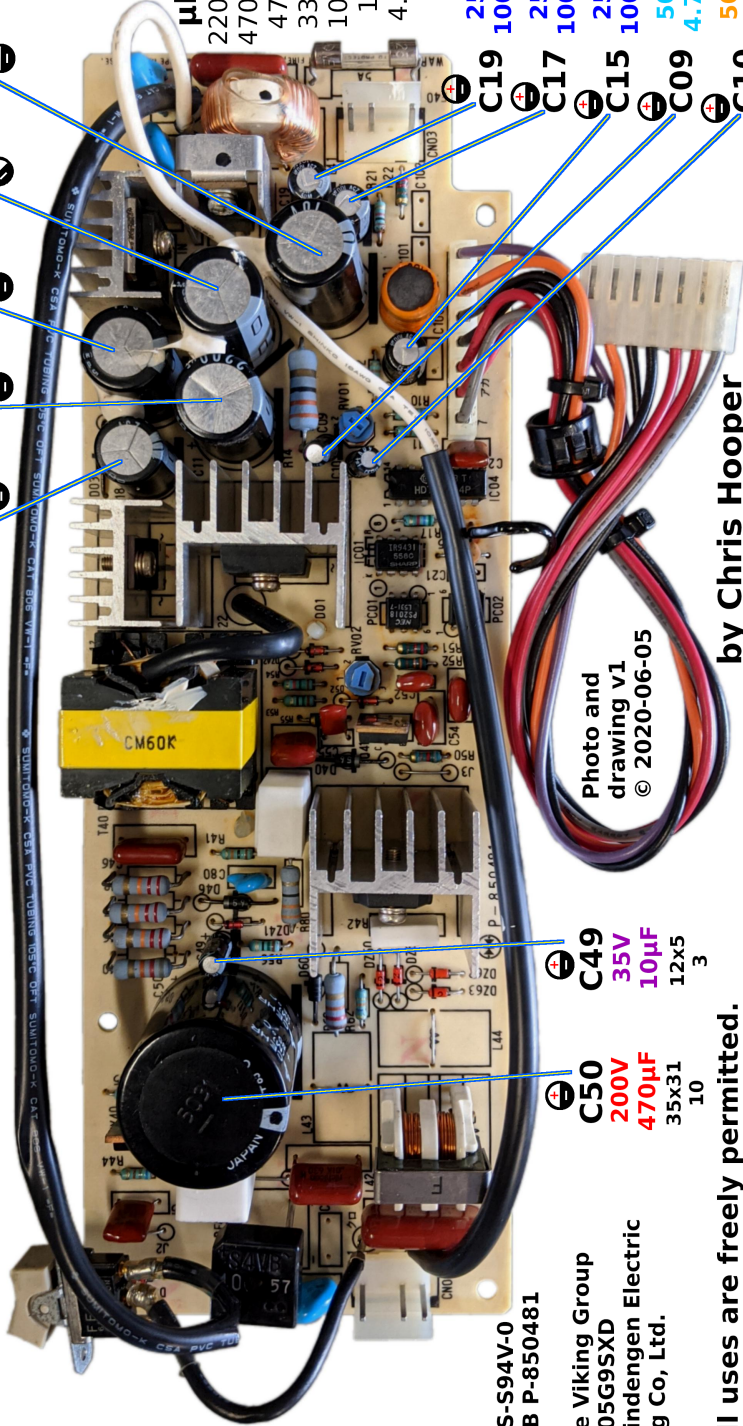

- 24x13 5V 25V C18
- 32x17 7.5V 10V 2200µF C11
- 26x17 7.5V 35V 470µF C16
- 32x17 7.5V 10V 2200µF C13
- 32x17 7.5V 10V 2200µF C12

- µF/V Qty Suitable Part**
- 2200/10 3 EEUFR1E222S
  - 470/200 1 LGX2D471MELA25
  - 470/35 1 EEUFC1J471B
  - 330/25 1 EEUFM1H331L
  - 100/25 3 EEUFR1H101
  - 10/35 1 EEUEB1J100SH
  - 4.7/50 1 EEUEB1H4R7S
  - 1/50 1 ECA2CHG010

- 25V 12x9 C19
- 100µF 3.5
- 25V 12x9 C17
- 100µF 3.5
- 25V 12x9 C15
- 100µF 3.5
- 50V 12x6 C09
- 4.7µF 2.5
- 50V 12x6 C10
- 1µF 2.5

SPS-S94V-0  
PCB P-850481

The Viking Group  
1305G9SXD  
Shindengen Electric  
Mfg Co, Ltd.

- C50 200V 470µF 35x31 10
- C49 35V 10µF 12x5 3

Photo and  
drawing v1  
© 2020-06-05

All uses are freely permitted.  
There is no warranty of accuracy for this work.  
by Chris Hooper  
amiga@cdh.eebugs.com